

MATERIAL: PHENOLIC

MOUNTING STYLE: CLASSIC

HINGE TYPE: BRUSHED ALUM BARREL

BRACKET TYPE: CONT. STAINLESS


PEDESTAL: STAINLESS STEEL

COLOR: ADVISE


⊙ = PEDESTAL

⊠ = BLOCKING


**A TYPICAL ALPACO CLASSIC ELEVATION**

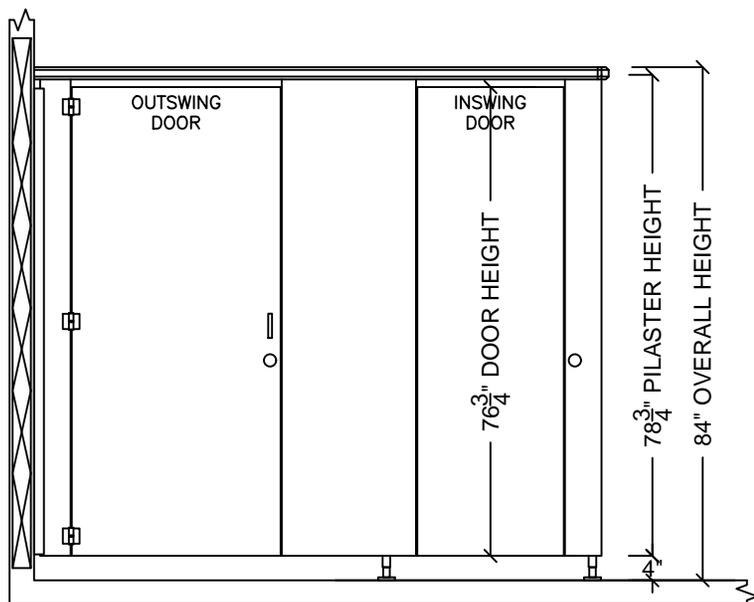

FRONT ELEVATION

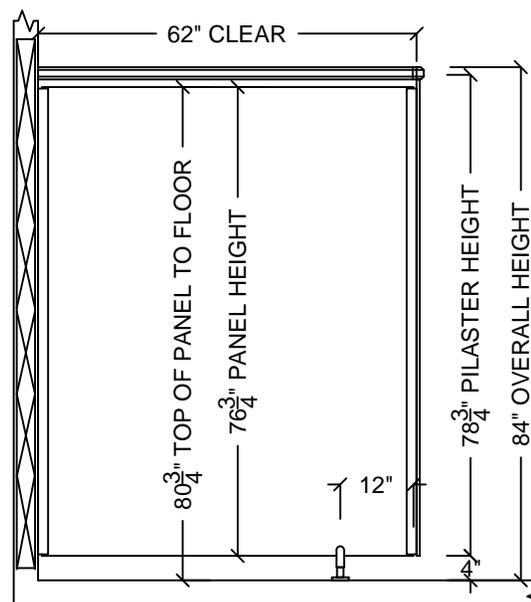

SIDE ELEVATION

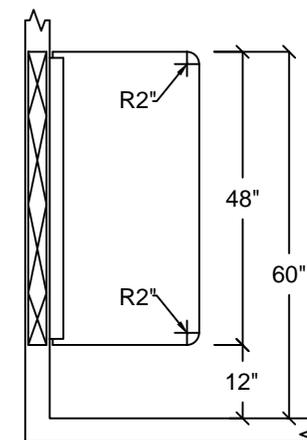

SCREEN SIDE ELEVATION

**NOTES:**

1. 1/2" THICK DOORS, PILASTERS & PANELS
2. INDICATOR LATCH
3. ROUTED DOORS & PILASTERS (NO-SIGHTLINE SYSTEM)
4. STAINLESS STEEL CONTINUOUS BRACKETS
5. PAINTED BLACK HEAD RAIL
6. ALL FASTENERS ARE TAMPER RESISTANT
7. 2" MINI. STRUCTURAL CONCRETE REQ'D
8. ALL DIMENSIONS ARE IN INCHES
9. DOORS - 3 BARREL HINGES PER DOOR

**FEDERAL ADA TOE CLEARANCE GUIDELINE**

604.8.1.4 Toe Clearance. The front partition and at least one side partition shall provide a toe clearance of 9 inches minimum above the finish floor and 6 inches deep minimum beyond the compartment-side face of the partition, exclusive of partition support members. Compartments for children's use shall provide a toe clearance of 12 inches minimum above the finish floor.

EXCEPTION: Toe clearance at the front partition is not required in a compartment greater than 62 inches deep with a wall-hung water closet or 65 inches deep with a floor-mounted water closet. Toe clearance at the side partition is not required in a compartment greater than 66 inches wide. Toe clearance at the front partition is not required in a compartment for children's use that is greater than 65 inches deep.

MATERIAL: PHENOLIC

MOUNTING STYLE: CLASSIC

HINGE TYPE: BRUSHED ALUM BARREL

BRACKET TYPE: CONT. STAINLESS


PEDESTAL: STAINLESS STEEL

COLOR: ADVISE


⊙ = PEDESTAL

⊠ = BLOCKING


**A TYPICAL ALPACO CLASSIC ELEVATION**

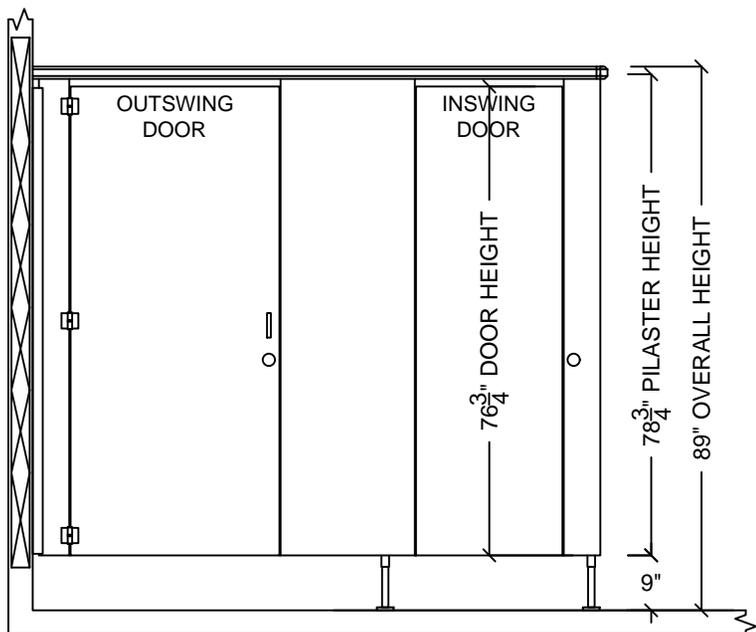

FRONT ELEVATION

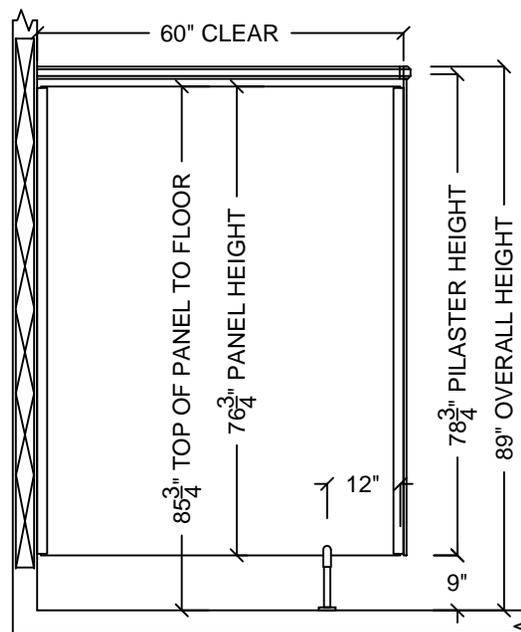

SIDE ELEVATION

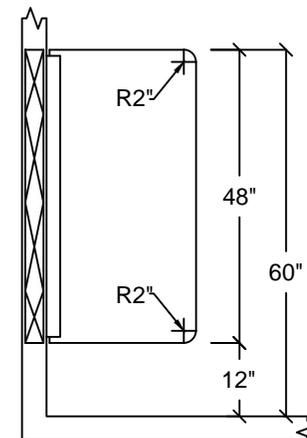

SCREEN SIDE ELEVATION

**NOTES:**

1. 1/2" THICK DOORS, PILASTERS & PANELS
2. INDICATOR LATCH
3. ROUTED DOORS & PILASTERS (NO-SIGHTLINE SYSTEM)
4. STAINLESS STEEL CONTINUOUS BRACKETS
5. PAINTED BLACK HEAD RAIL
6. ALL FASTENERS ARE TAMPER RESISTANT
7. 2" MINI. STRUCTURAL CONCRETE REQ'D
8. ALL DIMENSIONS ARE IN INCHES
9. DOORS - 3 BARREL HINGES PER DOOR

**FEDERAL ADA TOE CLEARANCE GUIDELINE**

604.8.1.4 Toe Clearance. The front partition and at least one side partition shall provide a toe clearance of 9 inches minimum above the finish floor and 6 inches deep minimum beyond the compartment-side face of the partition, exclusive of partition support members. Compartments for children's use shall provide a toe clearance of 12 inches minimum above the finish floor.

EXCEPTION: Toe clearance at the front partition is not required in a compartment greater than 62 inches deep with a wall-hung water closet or 65 inches deep with a floor-mounted water closet. Toe clearance at the side partition is not required in a compartment greater than 66 inches wide. Toe clearance at the front partition is not required in a compartment for children's use that is greater than 65 inches deep.



JOB: ALPACO CLASSIC

P.O. #

S.O.#

DIST:

LOC:

DWG #: 1

DATE: 2/27/2026

DRAWN BY: SDPB

SHEET: 1 OF 1