

MATERIAL: PHENOLIC

MOUNTING STYLE: ELEGANCE

HINGE TYPE: BRUSHED ALUM BARREL

BRACKET TYPE: CONT. STAINLESS


PEDESTAL: STAINLESS STEEL

COLOR: ADVISE


⊙ = PEDESTAL

⊠ = BLOCKING


A TYPICAL ALPACO ELEGANCE ELEVATION

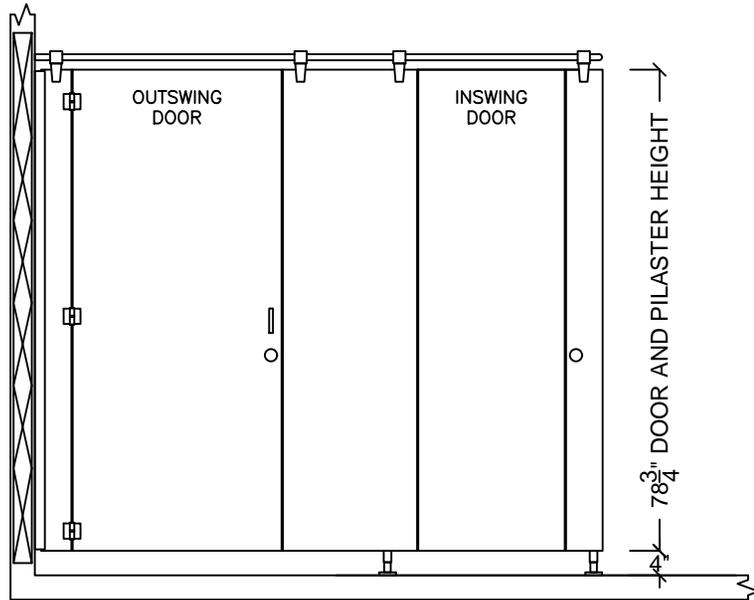

FRONT ELEVATION

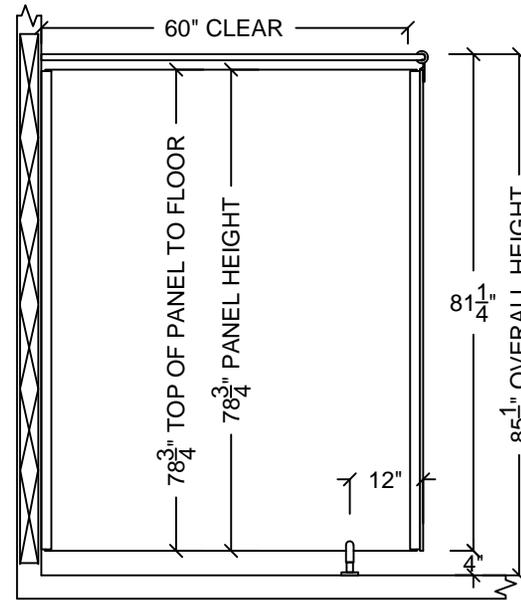

SIDE ELEVATION

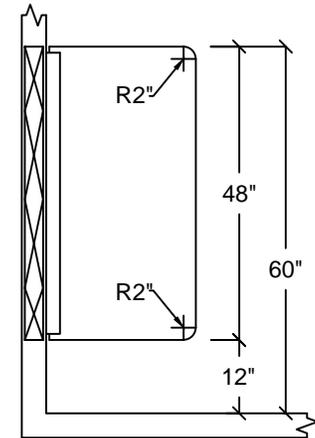

SCREEN SIDE ELEVATION

NOTES:

1. 1/2" THICK DOORS, PILASTERS & PANELS
2. INDICATOR LATCH
3. ROUTED DOORS & PILASTERS (NO-SIGHTLINE SYSTEM)
4. STAINLESS STEEL CONTINUOUS BRACKETS
5. STAINLESS STEEL HEADRAIL
6. PILASTERS 12" OR LARGER REQUIRE 2 HEADRAIL CLIPS
7. ALL FASTENERS ARE TAMPER RESISTANT
8. 2" MINI. STRUCTURAL CONCRETE REQ'D
9. ALL DIMENSIONS ARE IN INCHES
10. DOORS - 3 BARREL HINGES PER DOOR

FEDERAL ADA TOE CLEARANCE GUIDELINE

604.8.1.4 Toe Clearance. The front partition and at least one side partition shall provide a toe clearance of 9 inches minimum above the finish floor and 6 inches deep minimum beyond the compartment-side face of the partition, exclusive of partition support members. Compartments for children's use shall provide a toe clearance of 12 inches minimum above the finish floor.

EXCEPTION: Toe clearance at the front partition is not required in a compartment greater than 62 inches deep with a wall-hung water closet or 65 inches deep with a floor-mounted water closet. Toe clearance at the side partition is not required in a compartment greater than 66 inches wide. Toe clearance at the front partition is not required in a compartment for children's use that is greater than 65 inches deep.

MATERIAL: PHENOLIC

MOUNTING STYLE: ELEGANCE

HINGE TYPE: BRUSHED ALUMBARREL

BRACKET TYPE: CONT. STAINLESS


PEDESTAL: STAINLESS STEEL

COLOR: ADVISE


⊙ = PEDESTAL

⊠ = BLOCKING


A TYPICAL ALPACO ELEGANCE ELEVATION

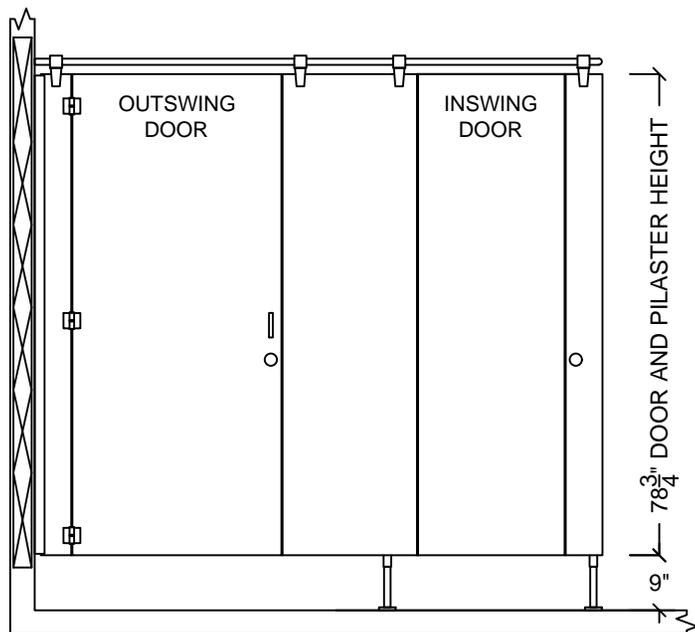

FRONT ELEVATION

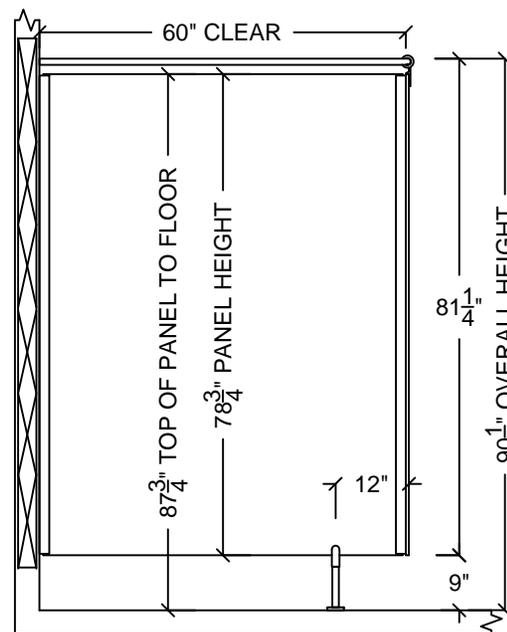

SIDE ELEVATION

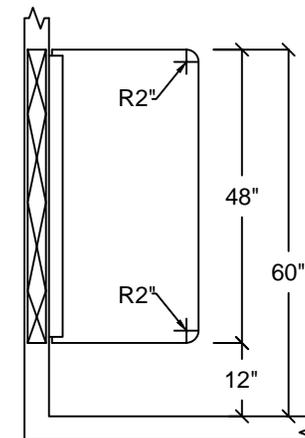

SCREEN SIDE ELEVATION

NOTES:

1. 1/2" THICK DOORS, PILASTERS & PANELS
2. INDICATOR LATCH
3. ROUTED DOORS & PILASTERS (NO-SIGHTLINE SYSTEM)
4. STAINLESS STEEL CONTINUOUS BRACKETS
5. STAINLESS STEEL HEADRAIL
6. PILASTERS 12" OR LARGER REQUIRE 2 HEADRAIL CLIPS
7. ALL FASTENERS ARE TAMPER RESISTANT
8. 2" MINI. STRUCTURAL CONCRETE REQ'D
9. ALL DIMENSIONS ARE IN INCHES
10. DOORS - 3 BARREL HINGES PER DOOR

FEDERAL ADA TOE CLEARANCE GUIDELINE

604.8.1.4 Toe Clearance. The front partition and at least one side partition shall provide a toe clearance of 9 inches minimum above the finish floor and 6 inches deep minimum beyond the compartment-side face of the partition, exclusive of partition support members. Compartments for children's use shall provide a toe clearance of 12 inches minimum above the finish floor.

EXCEPTION: Toe clearance at the front partition is not required in a compartment greater than 62 inches deep with a wall-hung water closet or 65 inches deep with a floor-mounted water closet. Toe clearance at the side partition is not required in a compartment greater than 66 inches wide. Toe clearance at the front partition is not required in a compartment for children's use that is greater than 65 inches deep.



JOB: ALPACO ELEGANCE

P.O. #

S.O.#

DIST:

LOC:

DWG #: 1

DATE: 2/27/2026

DRAWN BY: SDPB

SHEET: 2 OF 1